




# Type I - Iron Base Mount

Series: Velocity

Product: 160-GB2

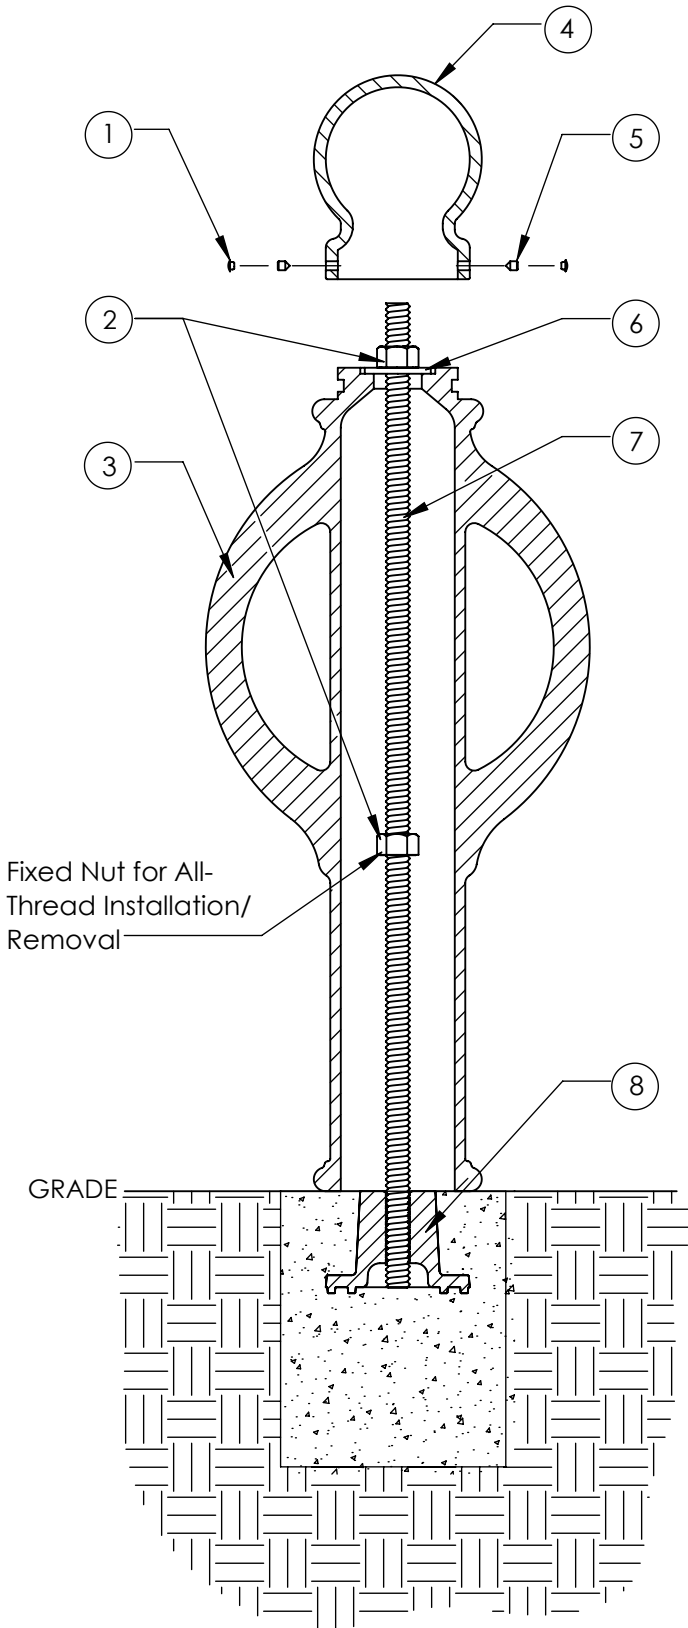

ITEM	QTY	PART	WEIGHT
1	2	Plastic screw caps .	.18 g. ea.
2	2	1" Stainless steel nut.	.34 lbs. ea.
3	1	Cast Iron plain B2 bollard body.	120 lbs.
4	1	Cast Iron globe bollard top.	20.1 lbs.
5	2	3/8" stainless steel set screws.	3.7 g. ea.
6	1	1" stainless steel washer.	.36 lbs.
7	1	41"-long 1" dia. stainless steel all-thread.	7.44 lbs.
8	1	Ductile iron mounting base.	9.6 lbs.

-Insert threaded rod into concrete-embedded anchor casting, tighten 1" nut onto washer securing bollard in place, use set screws to secure Globe top.

-Footer detail is for reference only; proper footer construction depends on local soil conditions and engineering requirements.