


Type S - Surface Mount

Series: Promenade

Product: 100 - GT

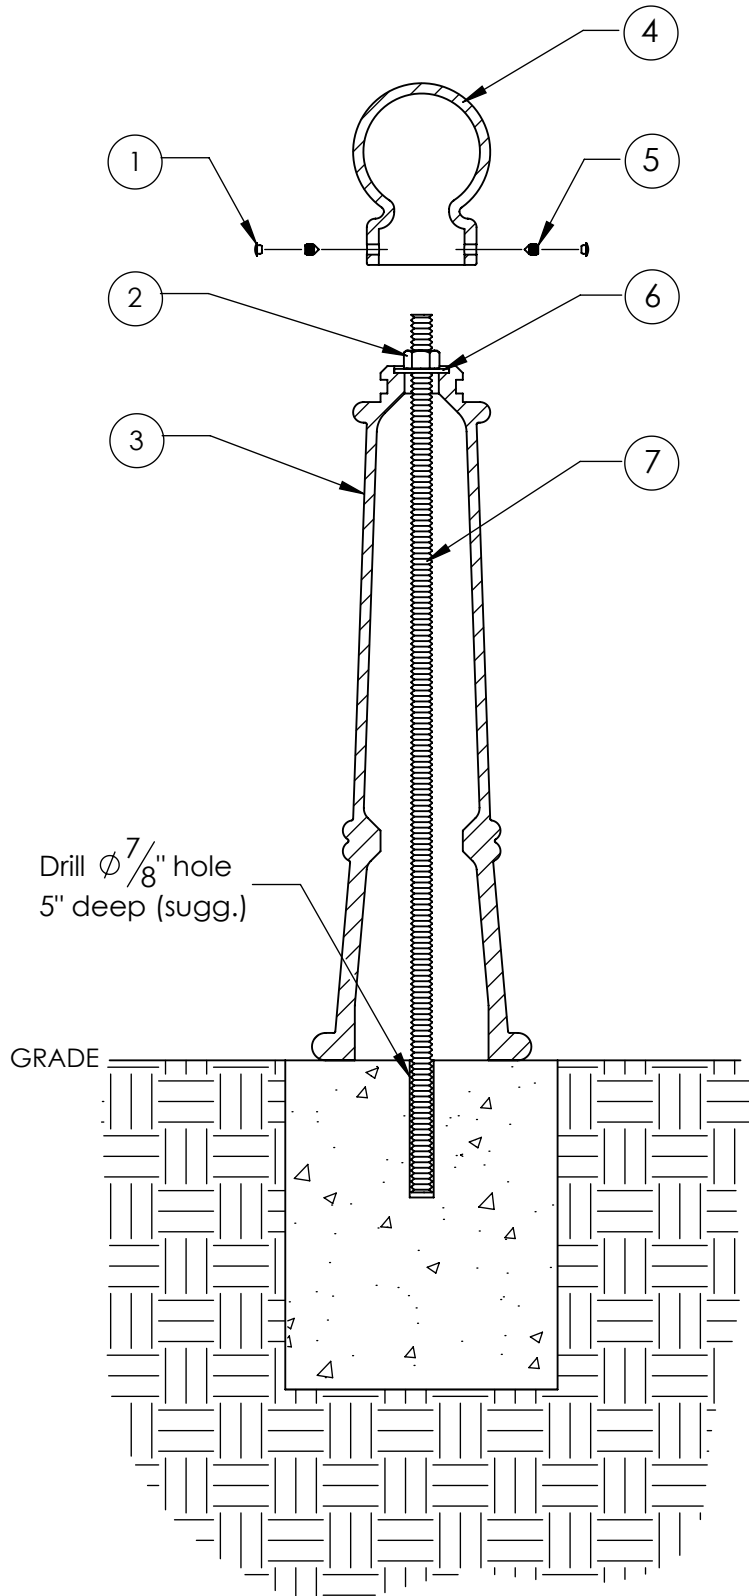

| ITEM | QTY | PART | WEIGHT |
|------|-----|--|-----------|
| 1 | 2 | Plastic screw caps. | .18g ea. |
| 2 | 1 | 3/4" Stainless steel nut. | .14 lbs. |
| 3 | 1 | Cast iron taper plain pedestal. | 53.2 lbs. |
| 4 | 1 | Cast iron small globe top. | 8.8 lbs. |
| 5 | 2 | 3/8" Stainless steel set screws. | 3.7 g ea. |
| 6 | 1 | 3/4" Stainless steel washer. | .11 lbs. |
| 7 | 1 | 32"-long 3/4" dia. stainless steel all-thread. | 3.2 lbs. |

-Anchor threaded rod into concrete with anchoring adhesive, tighten 3/4" nut onto washer securing bollard in place, use set screws to secure globe top.

-Footer detail is for reference only; proper footer construction depends on local soil conditions and engineering requirements.